

Manual Gate Conveyor




Standard features:

- Easy to operate, 'lift and pass'
- Solid welded steel frame construction
- PLC controlled
- Motorized width adjustment
- SMEMA interface

The manual gate conveyor allows people and vehicles to go through, rather than round a complete line. It consists of two conveyor sections, one fixed and one jointed.

The second (jointed) section is made a non-buffering section to keep it empty for as long time as possible, thereby allowing people to pass through even if the line has a heavy board flow. The jointed section is supplied with a counter-weight and shock absorber, to ensure a smooth movement.

Motors and cables are housed in the conveyor profile, giving the unit a clean appearance. Conveyor width adjustment is motorized and is operated manually by a toggle switch.

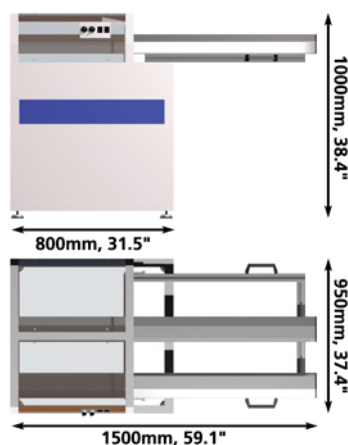

Technical information:

- Board transport level: 940 ± 30 mm (37 ± 1.2")
- Board length: 70 - 470 mm (2.8 - 18.5")
- Board width: 50 - 508 mm (2 - 20")
- Board thickness: 0.4 - 6 mm (0.0016 - 0.24")
- Max. board weight: 4 kg (8.8 lbs)
- Board edge clearance: 3 mm (0.12")
- Max. board warpage width: 0.5%
- Gate width: 700mm, (27.6")
- Voltage: 100 - 240 VAC, 50/60 Hz
- SMEMA Interface

Options:

- Automatic width adjustment

Order code: Manual gate, K-017-0186